

High Pressure Cleaning



PRESSURE WASH HOSE

Tube: Black synthetic rubber
Reinforcement: One/two braids of high tensile steel wire
Cover: Smooth black, blue, gray (yellow – oil resistant) abrasion & weather resistant synthetic rubber
Packaging: 50', 100' and reels
Application: Pressure wash equipment.

Part Number	Cover	Max Temp		Steam Service	ID in	OD in	Max WP psi	Min BR in	Weight lbs/ft	Coupling
		°F	°C							
PW4-06	Black	250	121	No	3/8	0.61	4,000	4.0	0.24	E
PW4B-04	Blue	250	121	No	1/4	0.48	4,000	3.0	0.19	E
PW4B-06	Blue	250	121	No	3/8	0.61	4,000	4.0	0.24	E
PW4G-06	Gray	250	121	No	3/8	0.61	4,000	4.0	0.24	E
PW4Y-06	Yellow	250	121	No	3/8	0.61	4,000	4.0	0.24	E
PW6-06	Black	250	121	No	3/8	0.67	6,000	6.0	0.39	E
PW6B-06	Blue	250	121	No	3/8	0.67	6,000	6.0	0.39	E
PW6G-06	Gray	250	121	No	3/8	0.67	6,000	6.0	0.39	E

PW PRESSURE WASH ASSEMBLIES



Part Number	Cover	Max Temp		Steam Service	ID in	Length	Max WP psi	Fitting A	Fitting B
		°F	°C						
PW4-06MMS50	Black	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4-06MMS75	Black	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4-06MMS100	Black	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS50	Blue	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS75	Blue	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS100	Blue	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS50	Yellow	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS75	Yellow	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS100	Yellow	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS50	Gray	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS75	Gray	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS100	Gray	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW6-06MMS50	Black	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6-06MMS75	Black	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6-06MMS100	Black	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS50	Blue	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS75	Blue	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS100	Blue	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS50	Gray	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS75	Gray	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS100	Gray	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel

High Pressure Cleaning

SK20 STEAM CLEANER/PRESSURE WASH HOSE



- Tube:** Black synthetic rubber
- Reinforcement:** Two braids of high tensile steel wire
- Cover:** Smooth black oil and abrasion resistant synthetic rubber
- Packaging:** Packaging: Reels
- Application:** Is used on either steam cleaner machines or combination steam cleaner/pressure wash machines.


STEAM SERVICE - UP TO 325°F (163°C)

Part Number	ID		OD		Max WP	Min BR		Weight	Two Piece Ferrule	Two Piece Insert
	in	mm	in	mm	psi	in	mm	lbs/ft		
SK20-06	3/8	14.8	0.58	14.8	350	4.0	101.6	0.28	SK20-06F	SK06-06MP
SK20-08	1/2	20.4	0.80	20.4	350	4.5	114.3	0.35	SK20-08F	SK08-08MP

WATER SERVICE - UP TO 250°F (121°C)


Part Number	ID		OD		Max WP	Min BR		Weight	Two Piece Ferrule	Two Piece Insert
	in	mm	in	mm	psi	in	mm	lbs/ft		
SK20-06	3/8	14.8	0.58	14.8	6,000	4.0	101.6	0.28	SK20-06F	SK06-06MP
SK20-08	1/2	20.4	0.80	20.4	6,000	4.5	114.3	0.35	SK20-08F	SK08-08MP

SK20 NO SKIVE FERRULE



Part Number	ID	D	L
	in	mm	mm
SK20-06F	3/8	25.0	28.0
SK20-08F	1/2	28.0	28.0

SK20 TWO PIECE INSERT




Part Number	ID	F	H	
	in		mm	in
SK06-06MP	3/8	3/8 - 18	28.6	1.12
SK08-08MP	1/2	1/2 - 14	35.0	1.38

SK20 - STEAM CLEANER ASSEMBLY

Part Number	ID	Length	Fitting A	Fitting B
	in			
SK20-06MM50	3/8	50	NPT-Solid	NPT-Solid
SK20-06MM100	3/8	100	NPT-Solid	NPT-Solid
SK20-08MM50	1/2	50	NPT-Solid	NPT-Solid
SK20-08MM100	1/2	100	NPT-Solid	NPT-Solid

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.

High Pressure Cleaning

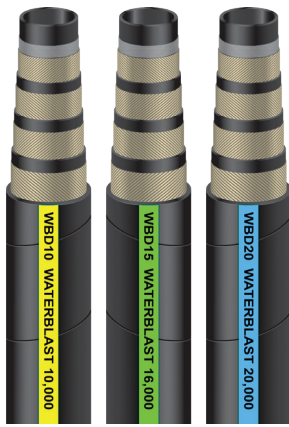

WBD WATERBLAST HOSE

Tube: Black synthetic rubber
Reinforcement: Four spiral wire
Cover: Black abrasion and weather resistant rubber
Temperature: -30°C to +70°C (-22°F to +158°F)
Application: Very high pressure water blasting.

Branding: WBD15-08 1/2" WATERBLAST 16000 PSI MAX WP

Part Number						
	in	in	mm	psi	in	lbs/ft
WBD10-08	1/2	0.97	24.6	10,000	8.0	0.61
WBD10-12	3/4	1.27	32.2	10,000	8.3	0.98
WBD10-16	1	1.53	38.9	10,000	12.6	1.34
WBD15-06	3/8	0.84	21.4	18,000	6.0	0.58
WBD15-08	1/2	1.00	25.4	16,000	8.0	0.76
WBD15-12	3/4	1.26	32.0	14,500	11.0	1.14
WBD20-08	1/2	1.16	29.5	20,000	8.0	0.97



Part Number	ID	Max WP	Length	Fitting
	in	psi	feet	
WBD10-08MM25	1/2	10,000	25	Male NPT
WBD10-08MM50	1/2	10,000	50	Male NPT
WBD15-06MM6	3/8	18,000	6	Male NPT
WBD15-06MM10	3/8	18,000	10	Male NPT
WBD15-06MM25	3/8	18,000	25	Male NPT
WBD15-06MM50	3/8	18,000	50	Male NPT
WBD15-06MM100	3/8	18,000	100	Male NPT
WBD15-08MM6	1/2	16,000	6	Male NPT
WBD15-08MM10	1/2	16,000	10	Male NPT
WBD15-08MM25	1/2	16,000	25	Male NPT
WBD15-08MM50	1/2	16,000	50	Male NPT
WBD15-08MM100	1/2	16,000	100	Male NPT
WBD15-12MM25	3/4	14,500	25	Male NPT
WBD15-12MM50	3/4	14,500	50	Male NPT
WBD15-12MM100	3/4	14,500	100	Male NPT
WBD10-16MM25	1	10,000	25	Male NPT
WBD10-16MM50	1	10,000	50	Male NPT
WBD10-16MM100	1	10,000	100	Male NPT
WBD15-08EE50	1/2	16,000	50	F - Metric
WBD20-08EE50	1/2	20,000	50	F - Metric

*All Waterblast hose is tested and sold as factory assemblies only.
 Other lengths available. Consult factory.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.

High Pressure Cleaning

QWB - WATERBLAST COUPLING

Application: Waterblast
Interchangeability: Dixon EA, Parker WB, Aeroquip FD69, Snap-Tite 56
Temperature Range: -40°C to +70°C (-40°F to +158°F)



Part Number	Size	Thread Size	Max WP	Material	Locking Method
			psi		
QWBC86FP	1/2"	3/8" F - NPT	10,000	Steel	Ball Bearing
QWBC88FP	1/2"	1/2" F - NPT	10,000	Steel	Ball Bearing



Part Number	Size	Thread Size	Max WP	Material
			psi	
QWBN86FP	1/2"	3/8" F - NPT	10,000	Steel
QWBN88FP	1/2"	1/2" F - NPT	10,000	Steel

QWS - WATERBLAST SCREW TO CONNECT

Application: Waterblast
Interchangeability: Dixon 4TDF4-SS, Spirstar, CQD, DNP CRS
Temperature Range: -40°C to +70°C (-40°F to +158°F)



Part Number	Size	Thread Size	Max WP	Material
			psi	
QWSC86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSC88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless



Part Number	Size	Thread Size	Max WP	Material
			psi	
QWSN86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSN88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless






BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.

High Pressure Cleaning






SEWER CLEANING HOSE



- Tube:** Yellow olefin
- Reinforcement:** Synthetic fiber
- Cover:** Polyurethane - orange for 2500 psi, blue for 3000 psi, green for 4,000 psi, red for 5,000 psi.
- Temperature:** -40°C to +71°C (-40°F to +160°F)
- Packaging:** Coils
- Application:** Sewer Cleaning hose is constructed from materials selected to provide rugged and reliable service under the most severe and demanding conditions found in high pressure sewer cleaning.

Part Number	Cover							Standard Pack
		ID	OD		Max WP	Min BR	Weight	
		in	in	mm	psi	in	lbs/ft	
SCH-2500-16-500	Orange	1	1.46	37.0	2,500	6.0	0.40	500' - Roll
SCH-2500-16-600	Orange	1	1.46	37.0	2,500	6.0	0.40	600' - Roll
SCH-2500-16-800	Orange	1	1.46	37.0	2,500	6.0	0.40	800' - Roll
SCH-3000-16-500	Blue	1	1.46	37.0	3,000	8.0	0.41	500' - Roll
SCH-3000-16-600	Blue	1	1.46	37.0	3,000	8.0	0.41	600' - Roll

Factory Crimped with Male NPT each end

Part Number	Cover							Standard Pack
		ID	OD		Max WP	Min BR	Weight	
		in	in	mm	psi	in	lbs/ft	
SLGR-02	Green	1/8	0.32	8.1	4,000	1.3	0.04	Coil
SLGR-03	Green	3/16	0.41	10.4	4,000	1.8	0.05	Coil
SLGR-04	Green	1/4	0.50	12.7	4,000	2.5	0.06	Coil
SLGR-06	Green	3/8	0.65	16.5	4,000	3.0	0.11	Coil
SLGR-08	Green	1/2	0.83	21	4,000	4.0	0.16	Coil
SLRD-04	Red	1/4	0.50	12.2	5,000	2.5	0.05	Coil
SLRD-06	Red	3/8	0.65	16.5	5,000	3.0	0.13	Coil

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.