


Service Plug

Accessories

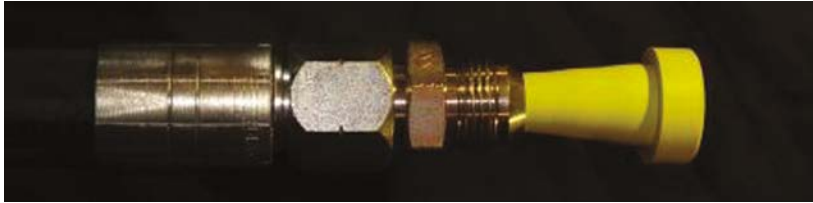

HOW TO USE The Service Plug is developed to plug hoses or rigid pipes to avoid oils and chemicals from contaminating the environment and to preserve costly oils and liquids inside systems during maintenance and repair. It can also be used to protect machine channels from dust and corrosion and when cleaning or painting, to prevent water, paint, dust and pollution from harming system and components

IMPORTANT For use in non pressurized systems and vacuum systems!

MATERIAL The Service Plug is produced in high quality oil resistant rubber

DIMENSIONS For channels and holes between (micro) 0.04 - 0.4" / (standard) 0.16 - 0.91" / (XL) 0.47 - 1.7"

TEMPERATURE -25°C - +90°C / -15°F - +195°F

TOOLS No tools needed! Use your hand. Insert, push then push and twist in the same action

CUTTING If the plug reaches the bottom it might be cut. If you chose to cut a plug in place, make sure to leave enough material outside the hole that you easily can remove the plug



Liverpool Location ISO 9001:2015 Certified QMS by Intertek

Download the JGB® Mobile App



Click for directions:

JGB® Headquarters
Liverpool, NY 13088
(315) 451-2770

Buffalo Branch
Cheektowaga, NY 14225
(716) 684-8224

Southeast Hub
Charlotte, NC 28273
(704) 588-9920

St. Louis Branch
St. Louis, MO 63111
(314) 256-0833

Williston Branch
Williston, ND 58801
(701) 774-2195

Houston Branch
Pasadena, TX 77503
(281) 930-7777

Connect with us:



www.jgbhose.com