


Metal Hose

T-REX[®] Hose

STRIPWOUND METAL HOSE

T-REX[™] (Roughbore) is Hose Master's torque-resistant stripwound metal hose with enhanced sealability. T-Rex[™] provides resistance to twisting, unwinding, and metal strip flare-up when cut.

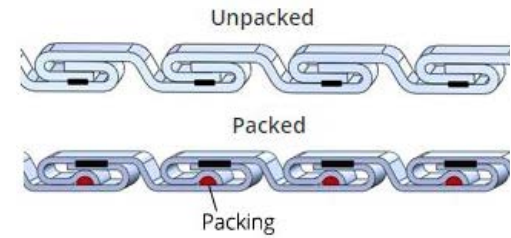

Applications:

- Dry bulk pneumatic conveying
- Material handling
- Pellet transfer
- Bulk unloading

Materials:

- GS - Galvanized Steel
- SS - T304 Stainless Steel
- 16 - T316 Stainless Steel
- 20 - T201 Stainless Steel

Thickness Codes:

- 15 - Light Weight
- 18 - Medium Weight
- 25 - Heavy Weight

Inside Dia. (in.)	RX 15 ___ (GS,SS,16,20)		RX 18 ___ (GS,SS,16)		RX 25 ___ (GS,SS,20)	
	Weight per foot (lbs.)	Min. Bend Radius (in.)	Weight per foot (lbs.)	Min. Bend Radius (in.)	Weight per foot (lbs.)	Min. Bend Radius (in.)
1.5	0.7	6				
2	1	8	1.1	8		
2.5	1.2	10	1.4	10		
3	1.4	12	1.6	12	2.5	13
3.5	1.6	14	1.9	14	2.8	15
4	1.8	16	2.2	16	3.2	17
4.5	2	17	2.4	17	3.6	19
5	2.2	19	2.7	19	4	21
6	2.7	23	3.2	23	4.7	25
7	3.1	27	3.7	27	5.5	29
8	3.5	30	4.2	30	6.2	33
9	3.9	34	4.7	34	7	37
10	4.4	38	5.2	38	7.7	41
11			5.7	42	8.5	45
12			6.2	45	9.3	49
13			6.7	49	10	53
14			7.2	53	10.8	56
15			7.7	56	11.5	60
16			8.2	60	12.3	64



Liverpool Location ISO 9001:2015 Certified QMS by Intertek

Download the JGB[®] Mobile App



Connect with us:



www.jgbhose.com

New England Region
Liverpool, NY 13088
(315) 451-2770

Great Lakes Region
Cheektowaga, NY 14225
(716) 684-8224

Mid-Atlantic Region
Charlotte, NC 28273
(704) 588-9920

Midwest Region
St. Louis, MO 63111
(314) 256-0833

Gulf Coast Region
Pasadena, TX 77503
(281) 930-7777

Click for directions: